

1. Tie a bowlen knot, or loop and crimp monofilament line through one of the holes.



2. Ensure loop of the line clears back of shaft and does not interfere with notch for sling



3. Line then proceeds towards muzzle of gun on left side



4. Line travels under triangle on
Left side of gun



5. Line travels over shaft and
down groove on other side.
Holding shaft in place.




5. Line under triangle and over shaft, down groove



5. Top view



5. Under view. Line running down back towards handle

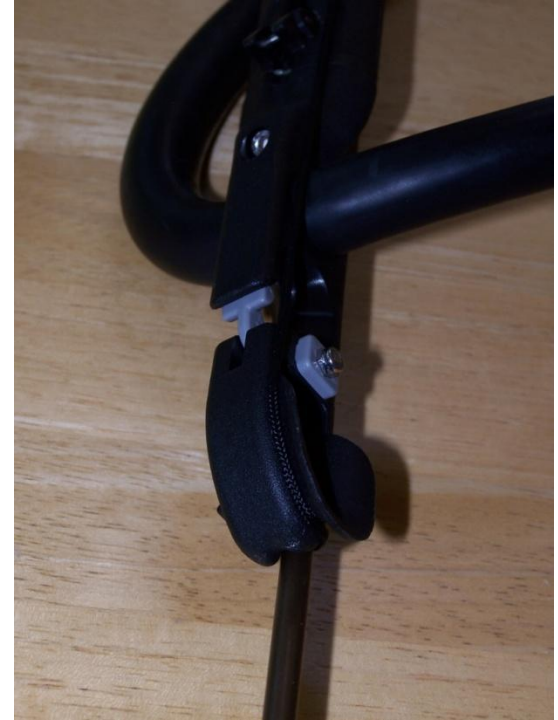

6. Line runs back towards handle and around line release.



7. Line wraps around line release and back towards muzzle of gun.



7. Line terminates at pin under the gun towards the barrel.

